

MONUMENT RECORD


Corner I.D. #

M-5

STATE OF INDIANA - COUNTY OF MONROE

Section Ten (10), Township 7 North, Range 1 East

Monument Description & Remarks: Found Sandstone Stone w/"X" at N-W Corner
of section. Stone is solid in ground & measures 0.4' x 0.6' x 0.3'; marked
by National Forest Boundary sign. Survey marker sign & post set.

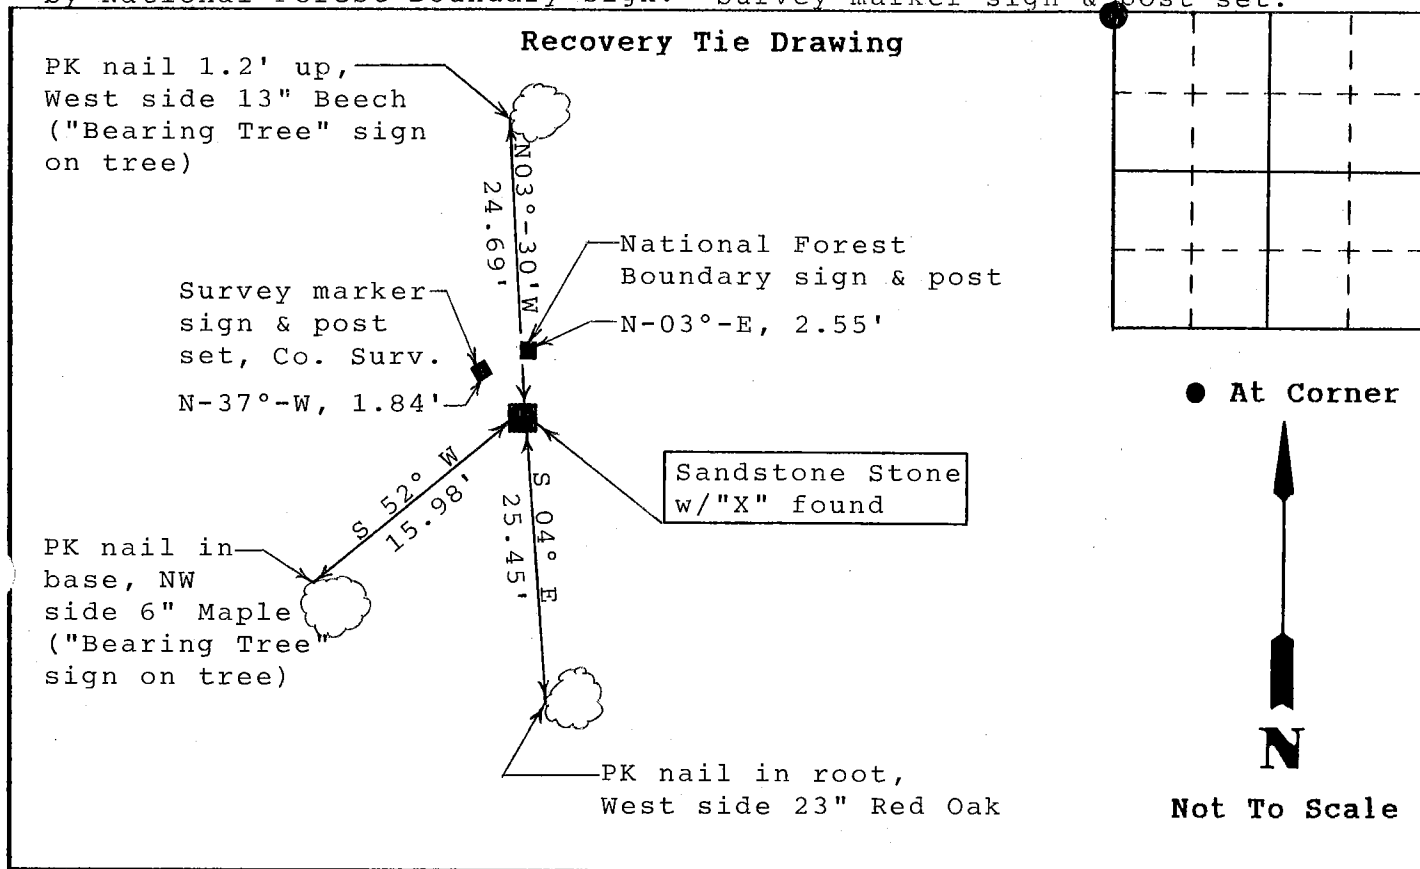

State of Indiana
County of Monroe

I, Michael W. Friley, County Surveyor, hereby certify
that this document was prepared under my direction in
accordance with the provisions of Section 17-3-64-4
through 17-3-64-8 of the Indiana Code, being Acts of 1965,
Chapter 319; and the above data is given under my hand and
seal this 8th day of May, 19 95 A.D.

Space
Reserved For
Recording
Officer

Indiana Registered Land Surveyor No. _____ or

Office of Monroe County Surveyor
United States Government Agency

Monroe County Surveyor
Title

Field Book:

95-01

Page:

35

Polk MAS

CERTIFIED LAND CORNER RESTORATION

State of Indiana }
County of Monroe } ss.

I Andrew J. Sobiech, do hereby certify that on the 27 day of May, 19 75, I found evidence of the Section corner of 3-4-9-10 Township 7 North, Range 1 East, Second Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner:

Description of original monument and accessories and subsequent restorations:

Original Monument was a wood post set in 1814
Original Bearing Trees:

Poplar	Beech
20"	6"
N 30 E	N 45 W
15 lks	16 lks

Subsequent survey by J. Spencer in 1856 filed in Monroe Co.
His bearing trees were:

Beech	W.O.
10"	15"
S 69 W	S 77 E
16 lks	19 lks


Description of corner evidence found:

Found sandstone .4' X .6' X .4 ft. high out of ground with a large + on top. Stone was at intersection of fences from north, south, and west. Found remains of bearing trees mentioned in Spencer records.

Description of monument and accessories I established to perpetuate the original location of this corner:

I left the stone in place and made the following witnesses:

Sign Post	Maple	Ash	Beech	Maple
4" x 4"	6"	3"	16"	3"
S 22° E	S 60° E	N 60° E	N 08° W	S 46° W
8.2 ft.	24.5 ft.	14.5 ft.	24.8 ft.	16.1 ft.

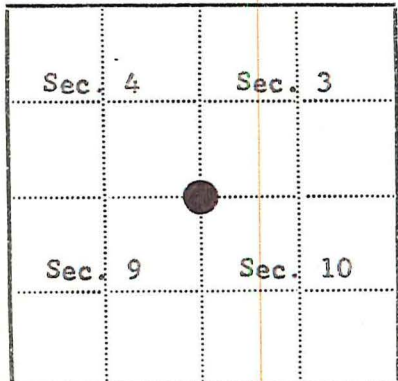

● = Corner monument restored
□ =

Field Assistant
Resident witnesses Henry Deaton - U. S. Forest Service

Dated at Brownstown Indiana, this 3 day of July 19 75.

Signature _____ Title R.L.S.
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Surveyors Registration No. S-0143

Office of _____ County of _____
I hereby certify that the within instrument was filed in this office for record on the _____ day of _____ 19 _____, and was filed in Book No. _____ Page No. _____ of County Records.


Signature _____ Title _____

Township 7 N, Range 1 E, Section 3:40, Index No. E-13, Page No. _____

Index No. E-13
(Alphabetical - Numerical)LAND CORNER RECORD
(RECTANGULAR SURVEYS)R9-7150-4 (Rev. 6/13/67)
GPD 802-127T. 2N R. 1E 2nd Mer. N.F. Hoosier County Monroe State Ind
Section 3 Corner common to sections 3 4 9 and 10

EXISTING SURVEYS

Original Government Survey		Original Evidence Found	
Year surveyed <u>1814</u>		Year of search _____	By _____
Original monument <u>Wood Post</u> (Wood post, stone, pile of stones, pipe, etc.)		Monument found _____	
Bearing Trees		Original Bearing Trees Found	
Species <u>Poplar</u>		Species _____	
Diameter <u>20"</u>		Diameter _____	
Bearing <u>N 30 E</u>		Bearing <u>None</u>	
Distance <u>15 IKs</u>		Distance _____	
Subsequent Corner Restoration		Evidence of Subsequent Corner Restoration Found	
Year surveyed <u>1856</u>	By <u>J. Spencer</u>	Year of search <u>1975</u>	By <u>T. Harrell - H. Porter</u>
Where filed or recorded <u>Monroe Co. Eng. Office</u>		<u>found sydn stone in fence N 3 E</u>	
Monument _____ (Original, concrete post, iron rod, etc.)		<u>intersection - found stump hole and</u>	
		<u>part of a stump</u>	
Bearing Trees, Reference Objects		Bearing Trees, Reference Objects	
Species <u>Beech</u>	<u>W 10</u>	<u>Stump hole</u>	<u>Stump</u>
Diameter <u>10"</u>	<u>15"</u>		
Bearing <u>S 69 W</u>	<u>S 77 E</u>	<u>S 69 W</u>	<u>S 77 E</u>
Distance <u>16 IKs</u>	<u>19 IKs</u>	<u>16 LKs</u>	<u>19 IKs</u>



Sketch

○ Corner ■ F.S. Land

Relation of Evidence to Record Features Along Section Lines

Section line to sections	Object	Record distance	Measured distance
<u>10</u>	<u>16</u>	<u>11.4</u>	<u>10.5</u>
<u>11</u>	<u>16</u>	<u>11.4</u>	<u>10.5</u>
<u>12</u>	<u>16</u>	<u>11.4</u>	<u>10.5</u>

Other Evidence

Describe evidence of use and occupation such as roads, fences, clearings, timber cutting lines, plantations, etc. Cite source of testimony if any. Stone measured4' x 6' x .4 Ft high out of ground with a large
+ on top.

Perpetuation Record

Monument and accessories established. Include brief description of area.

Sign	Post	Maple	Ash	Beech	Maple
<u>16"</u>	<u>6"</u>	<u>3"</u>	<u>16"</u>	<u>3"</u>	<u>3"</u>
<u>S 22° E</u>	<u>S 60° E</u>	<u>N 60° E</u>	<u>N 08° W</u>	<u>S 46° W</u>	<u>S 46° W</u>
<u>8.2 Ft</u>	<u>24.5 Ft</u>	<u>14.5 Ft</u>	<u>24.8 Ft</u>	<u>16.1 Ft</u>	<u>16.1 Ft</u>

At time of search:

1. Did you have the record description?

Yes ☒ No ☐

2. How was search area located?

Pacing, chaining, photos, maps,
etc. Fences3. Man hours spent in search 3 hr.4. Do you think additional search might
recover evidence? Yes ☐ No ☒5. Signature H. Deaton

Certified corner restoration certificate prepared:

Yes ☐ No ☐

Filed in county records at _____ Date _____ County Document No. _____

Identified on aerial photo No. _____ Which is filed at _____